

Compact[®]

Crane track doors

More space, more comfort, more efficiency



Designed
to fit. Made
for perfection.

Table of contents

Compact crane track doors	3
Maximize space	4
Comfortable working environment	5
Maintenance	6
Renovation	7
Safety	8
Installation & Service	9
Reference projects	10
Technical specifications	14
More info & Contact	15

Compact[®] crane track doors

From Rolflex

Maximum height, minimum hindrance.

In halls with crane tracks, optimal use of the available space is essential. Standard door solutions are often not an ideal solution here. They limit the available working height, offer poor insulation or do not let in any light.

The Compact door offers the best of both worlds: a minimal installation depth and a well-insulated, translucent solution. This allows you to use your crane track and your space optimally, without compromising on comfort or appearance.



30+ years of satisfied customers



Worldwide delivery



Made-to-order in Rolflex production facility

View all our solutions

www.rolflex.com

Maximum utilisation of space

- Install the crane track directly above your door without compromising door height or working height.
- The crane track can be attached to the facade (construction), there is no need to remove the track from the wall.
- Option: The door can also be mounted completely outside the building for optimum space saving.

Benefits of our Crane track doors

Mount the crane track wherever you want

Space-saving, no rails!

Durable and low-maintenance



A comfortable, **light working environment**

- Windows or glass panels for more natural light in your workshop
- Compact doors are insulated. This keeps your hall frost-free.



Low maintenance, **cost saving**

- No torsion springs, meaning fewer moving parts and significantly lower maintenance costs compared to standard sectional doors.
- Durable design, tested to over 100,000 cycles.
- Over 30 years of innovation: this generation of Compact doors is better than ever.

Perfect for **renovation**

- Thanks to its compact size, you can easily replace old roller or sliding doors. Without complicated renovations.
- A facelift for your building in 1 day!
- Available with integrated wicket doors for easy access.



Compact® & safe

Fall protection

Prevents damage or injury if the steel cable breaks.

Automatic locking

The automatic lock ensures that the door is always locked and cannot be opened from outside without permission.

Daylight protection

Compact doors with automatic closing are always equipped with a light curtain to prevent anything or anyone from becoming trapped under the closing door.

Slack cable protection

Prevents damage when the cable loses tension.

All Compact doors comply with
European Safety Standard

EN 12604

EN 12453

NEN 13241-1

CE certified

Installation & Service

Satisfied customers, trouble-free lifespan.

You may not realize it right away, but every business door is an essential part of your business. A non-functioning door can have a major impact on your business.

A Compact door will last for a long time. Professional installation and service are important contributors to a successful and trouble-free lifespan



Reference projects







Ter Linden Transport

Three Compact doors adorn the hall of Ter Linden. They were able to have a higher door installed by the Compact door, which also allows them to move larger goods easily.



Gloucester and Catterick Military Base

In this base, the crane track moves freely through the entire space thanks to the Compact doors.



CGT Carugate Milano

In this renovation project, the Compact doors ensured that neither the crane track nor the windows above the door were blocked. The hall is now lighter and better insulated than before.



DEMI Container services

At this container company, the Compact door ensures a smooth and efficient work process.

Technical specifications

Min/Max dimensions

Maximum dimensions for a Compact door are 7000 mm wide and 7960 mm high. In doors of 7 meters or wider, maximum 2 glass panels.

Colors and materials

Panels are available in 10 standard colours and optionally in all RAL colours. Glass panels or windows possible.

Sealing on all sides


The door opening is sealed on all four sides and between panels with rubber seals.

Dimensions of the headroom and depth

Depth of the door package: 730 mm
The additional space (above the door opening) required depends on the height of the door:

< 3080mm	: 420mm
3081 - 4300mm	: 520mm
4300 - 5520mm	: 630mm
5521 - 6740mm	: 770mm
6741 - 7960mm	: 890mm

All Compact doors comply with European safety standards **EN 12604** and **EN 12453**, **NEN 13 241-1** and **CE certified**.

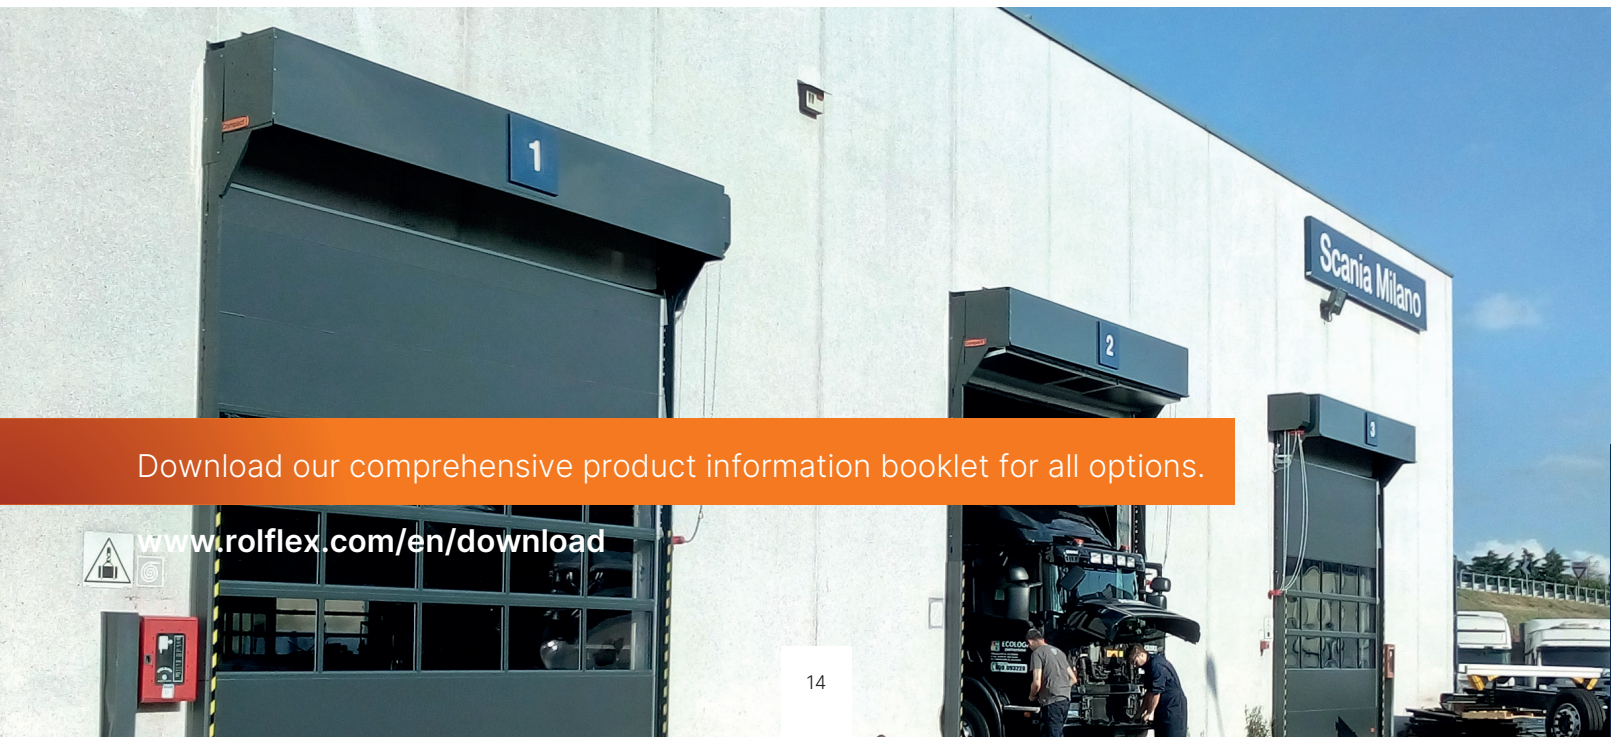



More info & **Contact**

To ask?

Please feel free to contact us if you have any questions or visit our website for frequently asked questions, downloads and reference projects.

Design your own Compact door

Discover all options, receive drawings and quotes from your local dealer using our free online Compact door configurator:

configurator.rolflex.com

rolflex.com

+31 (0)315 695 954



Designed
to fit. Made
for perfection.

Rolflex Nederland B.V.

Nijverheidsweg 23

7081 AE Uift, Netherlands

sales@rolflex.com

0315 695 954